EU-TYPE EXAMINATION CERTIFICATE

The following model of Personal Protective Equipment has been subjected to an EU-type examination in accordance with the module B of the PPE regulation (2016/425) and has been shown to satisfy to essential health and safety requirements.

Certificate N° 0075/1855/162/06/19/1926

Issued by CTC, Notified Body N°0075, to the following model of personal protective equipment :

Manufacturer : **SHANDONG XINRUIDA LABOR PROTECTIVE PRODUCTS CO., LTD**
NORTH OF WEIJIAO ROAD, EAST OF KANGCHENG STREET, ECONOMIC DEVELOPMENT ZONE, GAOMI CITY, SHANDONG
CHINA

Description

PPE Type : ***protective glove against mechanical risks***

Product reference : **NP132401P**

Article code : **/**

Glove description : **13G White Polyester Shell, Grey Nitrile Coating Glove**

Available sizes : **6/XS-12/XXXL**

Pictures :

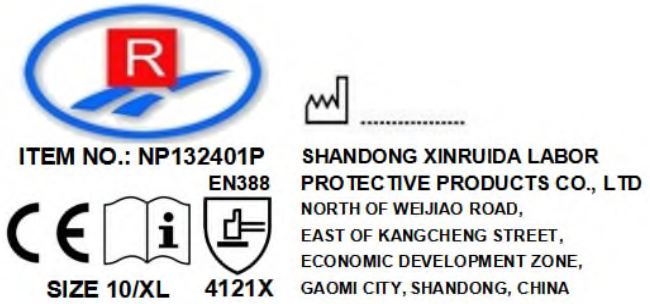

Reference standard :	Levels of performance / class of protection
« X » indicates that the glove has not been submitted to the test or the test method appears not to be suitable for the glove design or material.	
« 0 » indicates that the glove falls below the minimum performance level for the individual hazard.	
EN ISO 21420:2020	**-**
EN 388:2016 + A1:2018	**4 1 2 1 X**

At the date of the certificate, the product is in compliance with Annex XVII of REACh regulation (n° 1907/2006 and revisions)

Full description of the PPE, reference rules verified in the context of the EU-type examination and information given on the product are detailed in the user instructions and the manufacturer's technical file index 02 dated from MAY 2024.

NOTA : Any modification to new items of the personal protective equipment object of this EU type approval certificate or any modification of the information contained in the manufacturer technical file which served for the deliverance of the EU type approval certificate (change of address, change of company status) should be brought to the attention of the notified body in accordance with Annex V §7.2 of Regulation 2016/425. Any marking on the PPE which is not concerned by the Regulation (UE) 2016/425, is not covered by this certificate.

Issued in Lyon by
William GELAS
Certification manager

CE MARKING DEPARTMENT CTC NB 0075 EU-Type Examination Certificate

Date of first issue: 25 June 2019
Date of end of validity: 25 June 2029
Date of update 01: 14 May 2024

SHANDONG XINRUIDA LABOR PROTECTIVE PRODUCTS CO., LTD

MANUFACTURER'S TECHNICAL FILE TO THE PPE REGULATION 2016/425

Reference of the product	**:**	**NP132401P**
Article code	**:**	**/**
Technical file index	**:**	**02**
Last update	**:**	**MAY 2024**

IDENTIFICATION

Reference of the product :	:	NP132401P
Article code :	:	/
Basic Model		
Technical file index :	:	02
Last update :	:	MAY 2024

Manufacturer :

SHANDONG XINRUIDA LABOR PROTECTIVE PRODUCTS CO., LTD

NORTH OF WEIJIAO ROAD, EAST OF KANGCHENG STREET, ECONOMIC DEVELOPMENT ZONE, GAOMI CITY, SHANDONG

CHINA

tel : +86-536-2580591
fax : +86-536-2580591

Factory :

SHANDONG XINRUIDA LABOR PROTECTIVE PRODUCTS CO., LTD

NORTH OF WEIJIAO ROAD, EAST OF KANGCHENG STREET, ECONOMIC DEVELOPMENT ZONE, GAOMI CITY, SHANDONG

CHINA

tel: +86-536-2580591
fax: +86-536-2580591

GLOVE DESCRIPTION

General glove description and intended use:

13G White Polyester Shell, Grey Nitrile Coating Glove

This glove is designed against mechanical risks.

Type of coating finish : smooth

Visual description (picture back and palm sides) :

Risk assessment (Essential Health and Safety Requirement. Annex II - PPE Regulation)			
		Applicable	Covered by
§1	Requirements defined in the Annex II §1 are applicable to all PPE	☒	☒ Standard ☒ Instruction for use ☒ Marking
§1.4	Manufacturer's instructions and information is available	☒	☒ Standard ☒ Instruction for use ☐ Marking
§2.5	PPE which may be caught up during use	☒	☐ Standard ☒ Instruction for use ☐ Marking
§2.12	PPE bearing one or more identification markings or indicators directly or indirectly relating to health and safety	☒	☒ Standard ☒ Instruction for use ☒ Marking
§3.3	The PPE is intended to protect against mechanical injuries	☒	☒ Standard ☒ Instruction for use ☒ Marking

Glove constitution :

	Reference	Color	Material	Surfacic mass (g/m²)	Gauges	Thickness
Palm		grey	nitrile			1mm
		white	polyester	176g/m²	13	
Back		white	polyester	176g/m²	13	
Cuff		white	polyester+elastic	296g/m²	13	
Binding		Black	Polyester			

PROTECTION SCOPE

This glove meets the essential requirements of the Personal Protective Equipment Regulation 2016/425.

This glove is designed against mechanical risks.

It is a category II product.

GENERAL REQUIREMENTS

Standard EN ISO 21420 : 2020

Dexterity : 5

Available size range: 6/XS-12/XXXL

The hand sizing system is based on hand circumference and hand length as defined in EN ISO 21420 Annex B table B.1

SPECIFIC REQUIREMENTS AND PERFORMANCE LEVELS

« X » indicates that the glove has not been submitted to the test or the test method appears not to be suitable for the glove design or material.

« 0 » indicates that the glove falls below the minimum performance level for the individual hazard.

Mechanical hazard EN 388:2016 + A1:2018

Protection offered	Performance levels
Abrasion resistance	4
Blade cut resistance	1
Tear strength resistance	2
Puncture resistance	1
Cut Resistance method (EN ISO 13997)	X
Impact Protection	N/A

The levels of performance have been measured on the palm.

TEST REPORTS

Laboratory	CTC	Other
EN ISO 21420 + innocuousness	S211010446_1 S240301701_1 S191215616_1	
EN 388	S211010445_1 S211110648_1	

MARKING - PACKAGING

Information printed on the glove :

Logo of Manufacturer :
Logo CE
Glove's reference : NP132401P
Article Code : /
Size indicator
Pictograms related to risks against which protection is offered with performance levels
Information pictogram
Address of Manufacturer :
Date of Manufacture (month/year) and/or serial/batch number :
Date of obsolescence (month/year) if applicable:

Marking example :

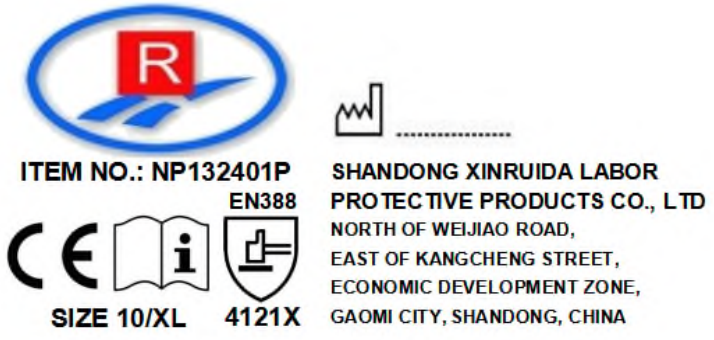

Marking of packaging example :

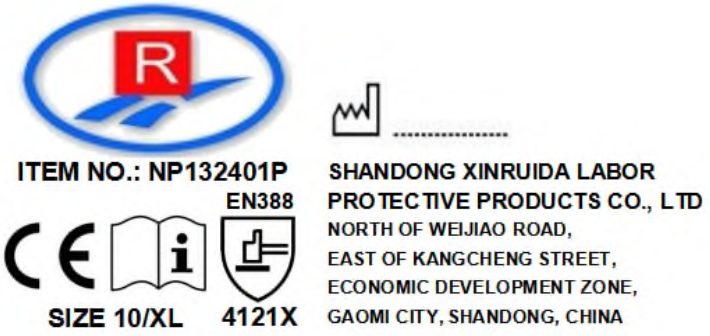

Method of marking on the glove :

PRINT LOGO ON THE BACK AND LABEL OF GLOVES

Packaging suitable for transport:

12 PAIRS/POLYBAG, THEN 120 PAIRS IN THE CARTON.

PPE subject to ageing :

The design performance can not be significantly affect by ageing when stored in appropriate conditions (humidity, temperature, clean , ventilated, light).

Cleaning instructions:

The gloves are not washable.

MEANS OF CONTROL

First is the incoming quality control, which is very important in purchasing the yarn. This is the primary control point to stop the defective materials into the productive process. Through some physical methods, such as visual, touch, compare with the samples, the best quality of yarns will be choosed for gloves.

Second is the inprocess quality control. The deployment of nitrile, the selection of gloves, the make of model, the print on the back of gloves and so on are the inprocess quality control. That means the quality control activities after the storage of materials and before the warehousing of finished goods. And the quality of the testing phase is called final quality control. We select samples randomly and do EN388 and ENISO 21420 tests every month, such as abrasion, blade cut, the PH, Azo, etc.

Finally is the outgoing quality control. When the goods are finished, the workers will choose the defective goods out. And that will be kept records. The quality record can provide objective evidence about the goods quality.

CERTIFICATE OF QUALITY MANAGEMENT SYSTEM CERTIFICATION

Certificate No.: 19819QI3837R1M
Unified Social Credit Code /Organization Code:91370785756383208B

We hereby certify that the organization:
SHANDONG XINRUIDA LABOR PROTECTIVE PRODUCTS CO., LTD
Is in conformity with Quality Management System Standard:
GB/T19001-2016 idt ISO9001:2015
The certificate is valid to the following product(s)/service:
Production of labor protective gloves (except those required to have qualification certificate)

Registration Address: NORTH OF WEIJIAO ROAD, EAST END OF KANGCHENG STREET, GAOMI ECONOMIC DEVELOPMENT ZONE, WEIFANG CITY, SHANDONG PROVINCE
Business Address: NORTH OF WEIJIAO ROAD, EAST END OF KANGCHENG STREET, GAOMI ECONOMIC DEVELOPMENT ZONE, WEIFANG CITY, SHANDONG PROVINCE

Date of Initial Issuance: Sep 05, 2019
Date of Renewal: Aug 01, 2022
Date of Expiration: Sep 04, 2025

中国认可
国际互认
管理体系
MANAGEMENT SYSTEM
CNAS C178-M

Issued By: Minyun Zhou

The certificate is valid within the period of validity of various state administrative licensing and qualification licensing
To maintain the validity of the certificate, the certified organization must accept and pass the regular surveillance audit
To check the validity of certificate, please visit our website at www.xjyrz.com or login to CNCA website at www.cnca.gov.cn, or scan QR code

Beijing Xinjiyuan Certification Co.,Ltd.
Address:Room 805, North Area, 7/F, Building 122, Nanhu Dongyuan,
Chaoyang District, Beijing China (Post Code:100102)

INSTRUCTIONS FOR USE

SHANDONG XINRUIDA LABOR PROTECTIVE PRODUCTS CO., LTD

NORTH OF WEIJIAO ROAD, EAST OF KANGCHENG STREET, ECONOMIC DEVELOPMENT ZONE, GAOMI CITY, SHANDONG

CHINA

Glove reference : NP132401P
Article code: /
User notice index : 02
Last update : MAY 2024

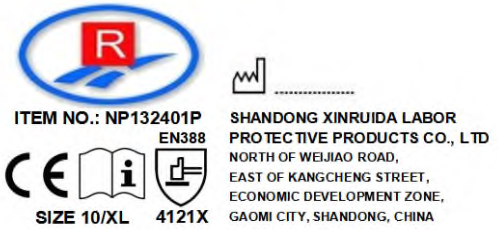

Glove description :

13G White Polyester Shell, Grey Nitrile Coating Glove

This glove is a personal protective equipment belonging to the category II.

It meets the requirements of the PPE Regulation 2016/425 : innocuousness, comfort, solidity.

It has been subject to a UE-type Examination performed by :

C.T.C. (0075)
4, rue Hermann Frenkel
69367 LYON Cedex 07
FRANCE

The glove meets the requirements of the standard EN ISO 21420:2020 « Protective Gloves - General requirements and test methods ».

Dexterity: 5

Available size range: 6/XS-12/XXXL

The hand sizing system is based on hand circumference and hand length as defined in EN ISO 21420 Annex B.

Information about marking

« X »indicates that the glove has not been submitted to the test or the test method appears not to be suitable for the glove design or material.

« 0 » indicates that the glove falls below the minimum performance level for the individual hazard.

The CE marking means that this product meets the requirements of the regulation 2016/425

Mechanical hazard - EN 388:2016 + A1:2018

4 1 2 1 X
Levels of performance

Abrasion resistance	4	(on 4 maxi)
Blade cut resistance	1	(on 5 maxi)
Tear resistance	2	(on 4 maxi)
Puncture resistance	1	(on 4 maxi)
Cut Resistance method (EN ISO 13997)	X	(A to F)
Impact Protection		

Read carefully the instructions for use provided with the product

Protection limit :

Users should be warned that gloves should not be worn when there is a risk of entanglement by moving parts of machines.

This model does not contain any substances at levels that are known to, or suspected to, adversely affect user hygiene or health.

The protection against risks or hazards which are not mentioned in this document is not warranted.

These levels of performance are obtained from the tests done according to conditions defined by the applicable standards.

The levels of performance mentioned are only valid for new gloves, not washed, nor regenerated.

Before use, the glove shall be visually inspected for any defect or imperfections. In case of deterioration, the gloves must be scrapped (abrasion, cut, tear…).

For gloves with two or more layers the overall classification does not necessarily reflect the performance of the outermost layer.

The levels of performance against mechanical risks are only valid for the palm of the glove.

Storage and cleaning notice

Keep in its original packaging, under ordinary temperature and humidity conditions and in clean, covered and ventilated premises.

The gloves are not washable.

PPE subject to ageing :

The design performance can not be significantly affect by ageing when stored in appropriate conditions (humidity, temperature, clean , ventilated, light).

Declaration of conformity :

Available with product.